

DENVER[™] HIGH PRESSURE TRAILER SYSTEMS


Highway tow 600 and 800 litre water bowser, mounted on single axle chassis, with petrol/diesel engine and pump combinations, capable of producing up to 16LPM max flow 276 Bar max pressure. Complete with a 30m high pressure hose reel and hose.

These are probably the most compact trailer mounted 600 & 800-litre pressure washers on the market today, with a total length of less than 2,5-metres. A rugged and well-constructed trailer, meeting all current regulations and Type Approval, with powerful engine and pump combinations. This trailer provides a solution to situations where water is readily needed away from a water source and for the most demanding of outdoor cleaning tasks.

The unit is ready to go and comprises of a baffled polyethylene tank with 600 or 800-litres capacities, and both options include an 18" manhole and lockable cover, mounted on a highway tow single axle chassis, complete with geared pump and engine combinations, plumbed to a heavy duty steel hose reel with 30-metres of high pressure hose.

BENEFITS OF THE DENVER[™] BOWSER

- Durable and corrosion resistant polyethylene tank, baffled for safe transport of water
- Heavy duty hot-dipped galvanised steel chassis, fully approved for towing on highways
- Adjustable jockey wheel and ball coupling (eye coupling option on request)
- Mudguards, 13-pin plug and highway lighting to EU specifications
- Two rear lights housed in a steel channel for protection
- Fitted with rubber suspension, auto-reverse braking and hand parking brake
- Available to order in red, green, yellow and blue

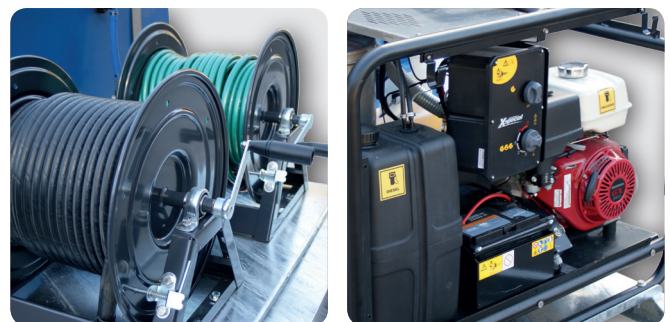

BENEFITS OF THE DENVER™ PUMP AND ENGINE

- Italian plunger pumps driven via a gearbox, with upto 276Bar max pressure and 16LPM max flow capabilities, suitable for powering accessories such as rotary hard surface cleaners and water brooms, etc.
- Reliable Honda petrol or Yanmar diesel engine options, for easy start and smooth, powerful performance, mounted on to the galvanised chassis
- Unloader valve with internal bypass, ensures longevity of the pump seals
- Inline suction filter, to prevent any muck from entering the pump
- Chemical injector valve with line and filter for applying detergents
- Pedestal mounted heavy duty lockable metal hose reel with 30-metres of twin-wire high pressure hose, 36inch dual lance and fan nozzle
- Assortment of 5 different nozzles, 15deg, 25deg, 40deg, pencil and foaming tips - for every eventuality.

These bowzers offer a solution to many situations for pressure washing where water is not available on site, such as boat yards, construction sites, farms and stables, amenity areas, etc.

MODEL - HP-TR0600B-15207PHR-150

- Maximum Rated Pressure - 207 Bar (2,900 PSI)
- Maximum Rated Flow - 15 LPM (3.95 GPM)
- Maximum Rated Temperature - 60°C (140°F)

OVERALL DIMENSIONS

L 2,450mm x W 1,750mm x H 1,270mm

Model - HP-TR0800B-H15207PHE-300D

- Maximum Rated Pressure - 207 Bar (2,900 PSI)
- Maximum Rated Flow - 15 LPM (3.95 GPM)
- Maximum Rated Temperature - 140°C (284°F)

OVERALL DIMENSIONS

L 3,600mm x W 1,750mm x H 1,450mm

Available as listed or with various pump, engine and reel mounts. Talk to us today to discuss your exact needs.

COLD WATER DENVER™ TRAILER SYSTEM



HP-TR0600B-15207PHR-150

HOT WATER DENVER™ TRAILER SYSTEM



HP-TR0800B-H15207PHE-300D